

Model IQ750EHS Caller ID Handsfree EHS-Capable Headset Business Telephone

Exciting *NEW* EHS Function

Offering an exciting new development for headset users, integrated Electronic Hookswitch (EHS) control has been built-in to suit most previous and all current Plantronics professional wireless headset models*. The EHS feature eliminates the need for the handset lifter and the Plantronics On Line Indicator (OLI) is also supported.


EHS "Headset Savvy" Features

- Electronic hook switch (eliminates the need for the mechanical handset lifter)
- EHS cable supplied
- Supports Plantronics On Line Indicator (OLI)
- Privacy prevents the handset from listening in to the headset call
- Headset cable polarity switch suits any headset cord
- Headset mic adjustment allows any headset mic type
- "Silent ringing" mode selectable so that incoming calls ring only in the headset to reduce office noise
- Built-in headset amplifier suits a wide range of headset types
- Can be used with other brands of wireless headset and also corded models of many brands



General Features

- Headset support suits many headset models from many different vendors
- 120 name and number memories, 20 of which appear on shortcut keys
- Caller ID display with on-screen message waiting (suits some systems)
- On line indicator support
- Ten (10) year parts and labour warranty
- Supports caller ID call waiting (CIDCW)
- 80 name and number incoming caller list
- Hearing aid compatible
- Volume control for headset and handset earpiece
- Pre-programmable memories to store network feature codes
- Acoustic shock protection for handset and headset

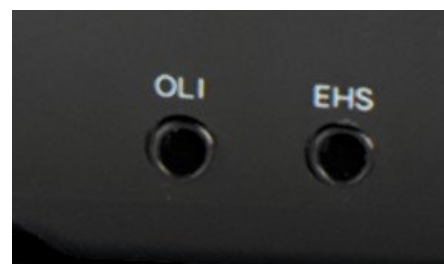

Connection ports on side casing

Brief Specifications of Interquartz IQ750EHS	
Dial Mode	Tone (DTMF)
10 Memory Buttons	32 digits and 16 characters
Pause	User selectable between 1 second and 100 milliseconds
PBX Recall	User selectable Timed Break Recall: 100mS, 200mS, 300mS and 600mS. Factory set to 100mS
Power Source	Line power supports basic functionality, 12VDC power for all features
Redial Function	32 digits
Ringer Lamp	Super-bright LED and Neon tube
Message Waiting light	Suits: Ericsson BP250, Alcatel, Exicom, Fujitsu, NEC, Nortel, Samsung, Lucent Index, Hybrex, LG Aria Panasonic TD500 & TDA Series, Avaya 8700 & IP Office and Aristel 265 System with A4SLU card only Optional: AT&T, Siemens ISDX, Siemens Hicom, Ericsson MD110 and some Hybrex
Dimensions	Width: 160mm; Length: 231mm; Height: 83.5mm
Ringer	Electronic with Hi/Lo/Off settings; 75 dBA at 30cm
Line Cord and Plug	3m line cord & plug (suits RJ11/12/14/45)
Wall Mount Kit	Wall Mount Kit No. 3 (order separately)
Operating Temp and Humidity	Temperature: 0-40° C; Humidity: 95% RH max, No dew forming
Regulatory Compliance	Complies with current ACA/Austel standards
Acoustic Shock Protection	Instantaneous – 110 dB SPL, (ACA standard 123 Db), Continuous – 115 dBA @ 1210 Hz (ACA standard 120 dBA)
Colour	Black ABS plastic

* Models CS510, CS520, CS530, CS540, Savi W710, W720, W730, W740 and previous models CS60, CS70N, CS351N, CS361N, 510S, Savi WO100, WO101, WO200, WO300, WO350, WO430 & WO440